


VIP Screens Hinged Window Fly Screen



Assembly and Fitting Instructions

READ THROUGH BEFORE STARTING


K1 Hinged Screen – Components...

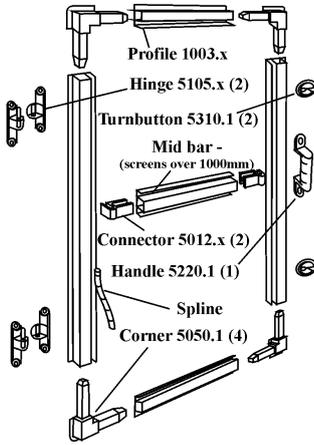

Profiles... (Scale 1:1)

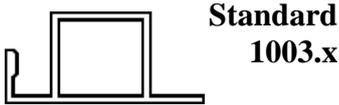

Finished Flyscreen Dimensions...

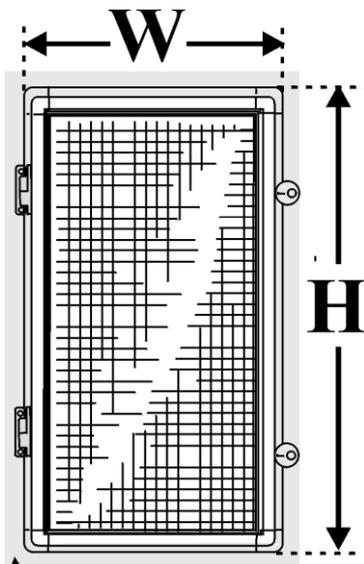

W= finished width of screen
H= finished height of screen

Shaded area shows window flat frame area, ideally 25mm or more all round.
The actual overlap of the screen onto the flat frame area should not be less than 5mm on any side.


Tools required:

Hammer
Centre punch
Hacksaw
Mitre block
Screwdriver
Drill, 3mm drill bit
Hobby/Stanley knife
Scissors
Tape Measure
Rubber Mallet
Pusher – (supplied)


1. Screen components *shown below.*




2. Square cut the outer profile to length. *Ideally use a mitre block for accuracy.* Cut two pieces at W-52mm and two at H-52mm. Screens that measure greater than 1000mm in W or H require a mid bar. Cut one piece at W-52mm.

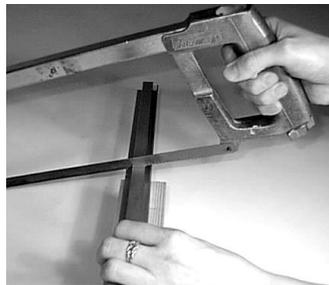


3. Corners should push fit, *it may be necessary to tap home with a rubber mallet.*

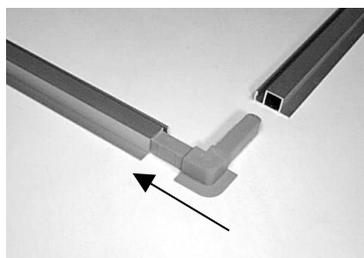


4. Insert corners in longest pair of profiles *as shown.*

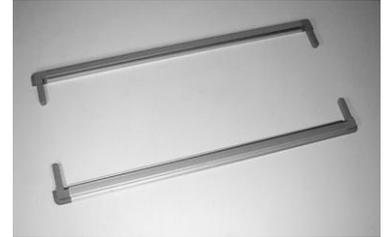


5. Complete the frame by fitting the remaining profile pieces.

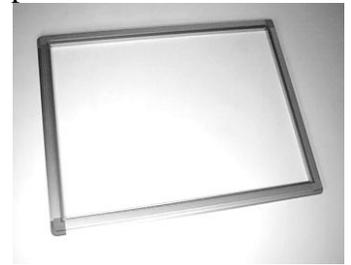


6. Centre punch corners on the back of the screen to secure. *As shown below.*

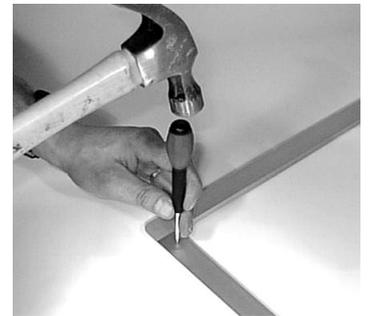

7. If mid bar is required, push fit the connectors into the profile at each end. To fit mid bar to frame, snap connectors onto spline groove. *Option: in addition, drill and screw at point shown arrowed below*

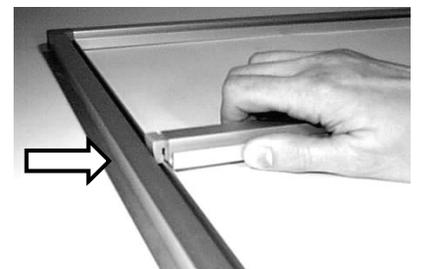


8. Lay the mesh over the frame Allow enough mesh to overlap by at least 20mm and trim *as shown*.

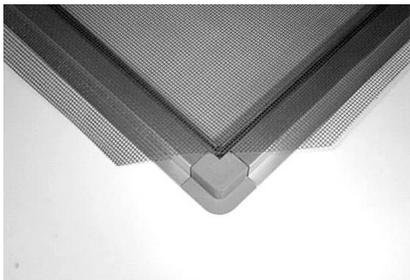

9. To secure the mesh, first insert the spline at top and bottom of frame, then at sides. Use the concave pusher tool to press spline into the groove. *Do not stretch the spline.*




10. Trim spline to length.

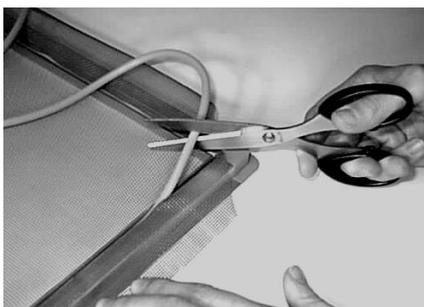

11. Trim mesh neatly to spline with knife *as below*.




Note: When trimming mesh use the knife at angle *shown below*.

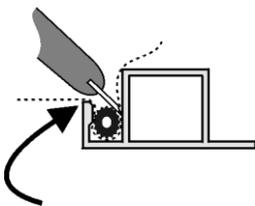


Avoid cutting mesh at this point.

12. To fit handle to screen, punch and pre-drill with a 3mm drill bit.

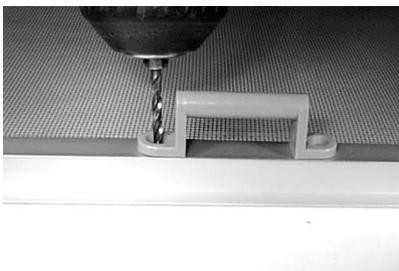

...then screw to profile.

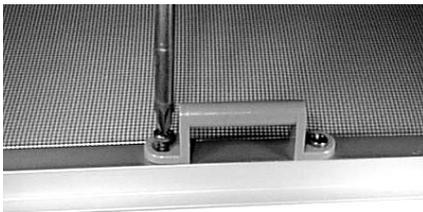

13. To fit the hinges first assemble together. Fit the larger hinge section to the screen. Centre punch, pre-drill with 3mm drill bit and screw to the profile. Hold screen in place on window frame and mark screw positions then secure. *Installed hinge pictured below.*



14. Fit the turnbuttons with a single screw to the window frame, so when pivoted they overlap onto the lip of the flyscreen profile.



Turnbutton *shown open below*.



15. The completed flyscreen with all components *is pictured below*.



For full details of all of our fly screens visit:

www.chainscreens.co.uk